

## Datalogic S.r.l.

Via San Vitalino 13  
40012 Calderara di Reno (BO)  
Italy  
Tel. +39 051 3147011  
Fax +39 051 3147205

### ©2025 Datalogic S.p.A. and/or its affiliates

All rights reserved. Without limiting the rights under copyright, no part of this documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means, or for any purpose, without the express written permission of Datalogic S.p.A. and/or its affiliates.

Owners of Datalogic products are hereby granted a non-exclusive, revocable license to reproduce and transmit this documentation for the purchaser's own internal business purposes. Purchaser shall not remove or alter any proprietary notices, including copyright notices, contained in this documentation and shall ensure that all notices appear on any reproductions of the documentation.

Electronic versions of this document may be downloaded from the Datalogic website ([www.datalogic.com](http://www.datalogic.com)). If you visit our website and would like to make comments or suggestions about this or other Datalogic publications, please let us know via the "Contact" page.

### Disclaimer

Datalogic has taken reasonable measures to provide information in this manual that is complete and accurate, however, Datalogic shall not be liable for technical or editorial errors or omissions contained herein, nor for incidental or consequential damages resulting from the use of this material. Datalogic reserves the right to change any specification at any time without prior notice.

### Trademarks

Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U.

Memor, Halogen and DeepSight are trademarks of Datalogic S.p.A. and/or its affiliates. All other brand and product names may be trademarks of their respective owners.

### EULA

See [www.datalogic.com/eula](http://www.datalogic.com/eula).

### Patents

See [www.patents.datalogic.com](http://www.patents.datalogic.com) for patent list.


### Reference Documentation

For further information refer to the SDK help on-line and to the Memor K20-25 User's Manual, downloadable from our website <https://developer.datalogic.com/mobile-computers>.

## Support Through the Website

Datalogic provides several services as well as technical support through its website.

Log on to [www.datalogic.com](http://www.datalogic.com).

For quick access, from the home page click on the search icon , and type in the name of the product you're looking for. This allows you access to download Data Sheets, Manuals, Software & Utilities, and Drawings.

Hover over the Support & Service menu for access to Services and Technical Support.

# MEMOR™ K20-25

## QUICK START GUIDE



**DATALOGIC**

Mobile Computer with 1D/2D Imager  
Model: DLMKLT (WWAN SKU)  
Model: DLMKWF (WLAN SKU)

See the Safety & Regulatory Addendum included with your product for additional regulatory, safety and legal information.

## Warranty Terms and Conditions

Refer to the Memor K20-25 User's Manual, downloadable from our website.

Read the following QR code for quick access to the product page. This allows you access to download Data Sheets, Manuals, Software & Utilities, and Drawings.



[www.datalogic.com](http://www.datalogic.com)



822004851 (Rev. B) April 2025

## OUT OF THE BOX

The Memor K20-25 package contains:

- Memor K20-25 PDA
- Rechargeable one-piece battery pack
- Quick Start Guide
- Safety & Regulatory Addendum

Remove all the components from their packaging; check their integrity and compare them with all the packing documents.



**CAUTION: Keep the original packaging for use when sending products to the technical assistance center. Damage caused by improper packaging is not covered under the warranty.**

## GENERAL VIEW

### Top View



Data Capture Window

### Front View



### Back View



### Side View




### Bottom View



INSTALL THE BATTERY

- 1. Slide the battery cover switch to the unlock position (right side); lift and remove the battery cover from the top.

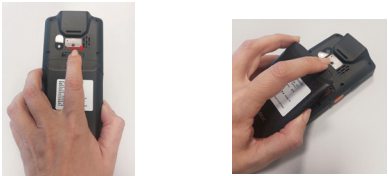

- 2. Insert the battery pack into the slot, top first, and press it into place.



- 3. Insert the battery cover (bottom first) and press it into place; slide the battery cover switch to the lock position (left side).



**CAUTION:** Always use Datalogic approved batteries designed specifically for the Memor K20-25 device.

CHARGING INSTRUCTIONS

The battery pack is not initially fully charged. After installing the battery, charge it with the power supply or with the single slot dock for minimum 3.5 hours. During the charging process the charging LED positioned at the top left side of the display glows red constantly. Once the charging process has been completed, the charging LED glows green constantly.

**NOTE:** Using the device while the battery is charging will significantly increase the time required to reach a full charge.

**NOTE:** The Memor K20-25 may get warm during charging. This is normal and does not mean a malfunction.

**CAUTION:** Ensure all the components are dry before performing any type of connection to the Memor K20-25. Any damage caused by use of wet equipment is not covered by warranty.

Charge with the USB Cable

Use the USB Type-C cable (sold separately, p/n 94A050044) in conjunction with the power supply adapter (sold separately, p/n 94ACC0383 or 94ACC0390\*) to charge the device from a power outlet.




**CAUTION:** Use only a Datalogic power supply (p/n 94ACC0383 or 94ACC0390\*) to power the Memor K20-25.

Charge with the Single Slot Dock

**NOTE:** Insert the adapter when the device is used without the protective boot. Remove the adapter if the device is used with the protective boot.

Insert the device into the dock with the screen facing front and the head facing up.



To remove the device from the dock, pull it upwards while holding the dock firmly down.

**CAUTION:** Use only a Datalogic approved power supply to power the single slot dock.

**NOTE:** For information on the single slot dock refer to the Quick Start Guide included in the dock's box.

**NOTE:** The Memor K20-25 may get warm during charging. This is normal and does not mean a malfunction.

\* According to local regulation

INSTALL THE SD/SIM\* CARD

- 1. Remove the battery cover (see "Battery Installation", step 1).
- 2. Remove the battery.
- 3. Insert the SD card into the left slot with the written part upward.  
Insert the SIM card into the right slot with the written part upward (Memor K 25 WWAN models only).




- 4. Replace the battery and the battery cover (see "Install the Battery", steps 2 and 3).

TURN ON/OFF THE DEVICE

To turn on the Memor K20-25, press and hold the Power Button for at least 3 seconds.

To turn off the Memor K20-25, press and hold the Power Button until the Reboot Options Menu appears end then tap Power Off.



Force Restart

Press and hold the Power Button for at least 10 seconds to force restart.



SCANNING AND IMAGING

- To scan a bar code symbol:
- 1. Point the scan window at the bar code.
  - 2. Press one of the scan triggers. A red cross illuminates the symbol, which is captured and decoded.

If the scan has been successful:

- If enabled, the good read beep plays.
- If enabled, the good read indicator positioned at the top left side of the display glows solid green.



The decode results display on the screen.



Aiming Beam

The aiming beam is smaller when the device is closer to the barcode and larger when it is farther from the barcode.

Scan symbols with smaller bars or elements (mil size) should be read closer to the unit and those with larger bars or elements (mil size) should be read farther from the unit.

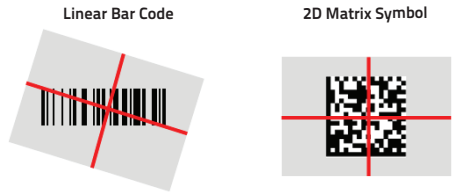

**CAUTION:** When cleaning the device, avoid applying the detergent directly on the contacts. Moisten a soft dry cloth with an approved cleaning agent (refer to the Memor K20-25 User's Manual) to rub it across them. Do not leave any residue.

\* Memor K 25 WWAN models only