


## S510 RUGGED LAPTOP



- AI-ready with the latest Intel® Core™ Ultra Processors and Intel® AI Boost technology
- 15.6" display with Getac sunlight readable technology (1,000 nits) and glove-enabled capacitive touchscreen
- Sustainable chassis with enterprise-level ruggedness for a greener future
- Enhanced enterprise security with Intel® vPro®, Windows Hello face-authentication camera, TPM 2.0, and many more multi-factor authentication options
- Versatile I/O options including up to two Thunderbolt™ 4 and docking solutions

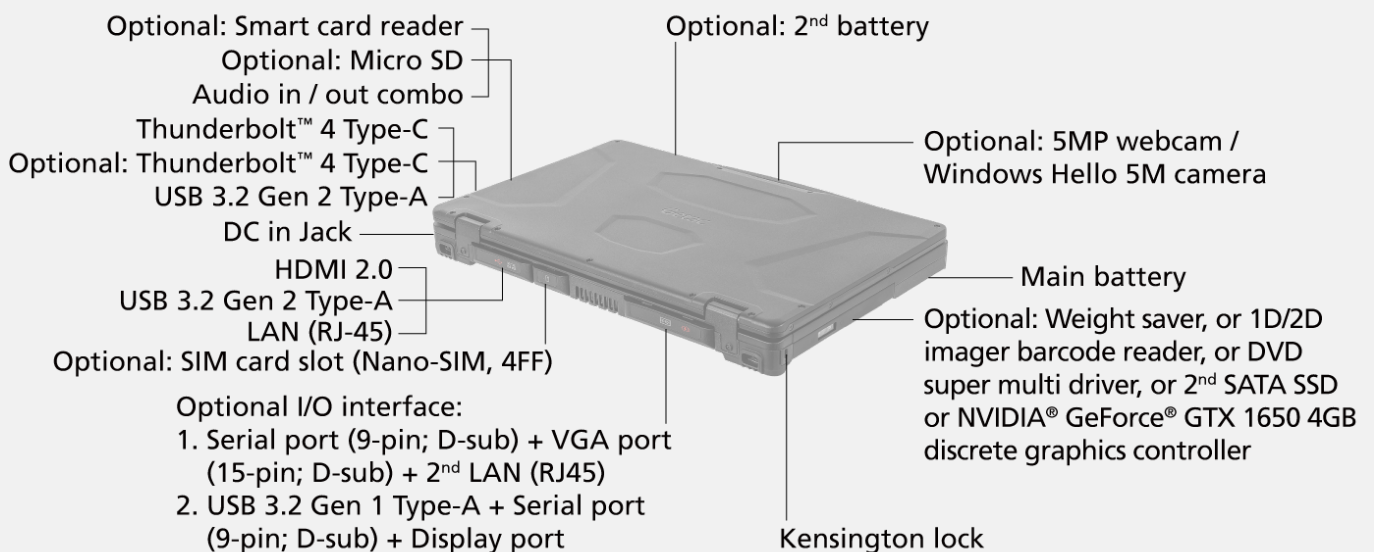

## SPECIFICATIONS

### Generation

G1

### Operating System

Windows 11 Pro

### CPU (Mobile Computing Platform)

Intel® Core™ Ultra 5 processor 125U  
Max. 4.3GHz with Intel® Turbo Boost Technology  
- 12 MB Intel® Smart Cache

### Platform options:

Intel® Core™ Ultra 5 processor 135U, vPro® Enterprise<sup>i</sup>  
Max. 4.4GHz with Intel® Turbo Boost Technology  
- 12 MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 155U  
Max. 4.8GHz with Intel® Turbo Boost Technology  
- 12 MB Intel® Smart Cache

Intel® Core™ Ultra 7 processor 165U, vPro® Enterprise<sup>i</sup>  
Max. 4.9GHz with Intel® Turbo Boost Technology  
- 12 MB Intel® Smart Cache

### GPU (VGA Controller)

Intel® Graphics  
Optional: NVIDIA® GeForce® GTX 1650 4GB  
discrete graphics controller<sup>ii, iii</sup>

### GPU

Intel® AI Boost

### Display

15.6" TFT LCD FHD (1920 x 1080)  
Protection film  
1,000 nits display with Getac sunlight readable technology  
Optional: Capacitive multi-touch LumiBond screen<sup>ii</sup>

### Storage & Memory

8GB DDR5  
Optional: 16GB / 32GB / 64GB DDR5

256GB PCIe NVMe SSD  
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Optional: Multimedia bay 2nd storage: 512GB /  
1TB SATA SSD<sup>iii, iv, v</sup>

### Keyboard

LED backlit membrane keyboard

### Pointing Device

Touchscreen  
- Optional: Capacitive multi-touch screen touchpad  
- Glide touchpad with multi-touch

### Expansion Slot

Optional: Smart card reader

### Multimedia Bay

Weight saver  
Optional: 1D/2D imager barcode reader<sup>iii</sup>  
Optional: DVD super multi drive<sup>iii, iv, xvii</sup>  
Optional: 2nd Storage<sup>iii, iv, v</sup>  
Optional: NVIDIA® GeForce® GTX 1650 4GB  
discrete graphics controller<sup>ii, iii</sup>

### I/O Interface

Audio in/out combo x 1  
DC in Jack x 1  
USB 3.2 Gen 2 Type-A x 2  
Thunderbolt™ 4 Type-C x 1  
Optional: MicroSD x 1  
LAN (RJ45) x 1  
HDMI 2.0 x 1  
Docking connector x 1  
Optional: 5M pixels webcam x 1<sup>viii</sup>  
Optional: SIM card slot x 1 (Nano-SIM, 4FF)<sup>vi</sup>  
Optional: Windows Hello face-authentication 5M camera  
(front-facing) x 1<sup>vii</sup>  
Optional: RF antenna pass-through for GPS, WWAN and  
WLAN  
Optional: Thunderbolt™ 4 Type-C x 1<sup>i</sup>

### Configurable I/O options :

1. LAN (RJ45)<sup>viii</sup> + Serial port (9-pin; D-sub) + VGA port  
(15-pin; D-sub)  
2. USB 3.2 Gen 1 Type-A + Serial port (9-pin; D-sub) +  
Display port

### Communication Interface

10/100/1000 base-T Ethernet  
Intel® Wi-Fi 6E AX211, 802.11ax  
Bluetooth (v5.3)<sup>ix</sup>  
Optional: 2.5GBASE-T Ethernet<sup>viii</sup>  
Optional: 4G LTE mobile broadband with integrated GPS<sup>vi, xii</sup>  
Optional: 5G Sub-6 with integrated GPS<sup>vi, xiii</sup>  
Optional: Dual SIM (Nano-SIM 4FF and e-SIM)<sup>vi, x</sup>

### Security Feature

TPM 2.0  
Kensington lock  
Optional: Intel® vPro® Technology<sup>i</sup>  
Optional: Fingerprint reader  
Optional: HF RFID reader<sup>xiii</sup>  
Optional: Windows Hello face-authentication 5M camera  
(front-facing)<sup>vii</sup>

### Power

Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (65W, 100-240VAC)  
Optional: 2nd battery (10.8V, typical 6900mAh; min. 6600mAh)<sup>ii</sup>  
Optional: AC adapter (90W, 100-240VAC, 50/60Hz)<sup>ii</sup>

### Dimension (W x D x H) & Weight

375 x 277 x 39mm (14.8" x 10.9" x 1.5")  
2350g (5.18lbs)<sup>xv</sup>

### Rugged Feature

MIL-STD-810H certified  
IP53 certified  
Vibration & 3ft (0.9m) drop resistant<sup>xv</sup>

### Environmental Specification

Temperature<sup>xvi</sup>:  
- Operating: -29°C to 63°C / -20°F to 145°F<sup>xvii</sup>  
- Storage: -51°C to 71°C / -60°F to 160°F  
Humidity:  
- 95% RH, non-condensing

### Pre-installed Software

Getac Utility  
Getac Geolocation  
Getac Barcode Manager<sup>xviii</sup>  
Optional: Absolute Persistence<sup>ix</sup>

### Optional software

Getac Driving Safety Utility  
Getac Device Monitoring System (GDMS)  
Getac VGPS Utility<sup>xix</sup>

### Accessories

Battery (10.8V, typical 6900mAh; min. 6600mAh)  
AC adapter (65W, 100-240VAC)

### Optional:

Carry bag  
Battery (10.8V, typical 6900mAh; min. 6600mAh)  
Multimedia 2nd SSD<sup>iii, iv, v, xx</sup>  
Multimedia bay DVD super multi drive<sup>iii, iv, xix</sup>  
AC adapter (90W, 100-240VAC, 50/60Hz)<sup>i</sup>  
DC-DC vehicle adapter (120W, 11-32VDC)  
Multi-Bay charger (Dual-Bay)  
Multi-Bay charger (Eight-Bay)  
Capacitive stylus with tether  
Protection film  
Vehicle cradle  
Vehicle dock<sup>xxi</sup>  
Spare SSD kit  
100W Type-C adapter  
DS100 USB-C docking station

**Warranty**  
Nothing says quality like a manufacturer standing behind their product. We've designed the notebook from the inside out to survive drops, shocks, spills, vibration and more. We're confident in our quality and that's why it comes standard with the industry leading 3 years warranty. It's the peace-of-mind protection of knowing you're covered.

### Standard

3 years limited warranty

# S510 RUGGED LAPTOP

- I. vPro® Enterprise is available for configuration with two Thunderbolt™ 4 Type-C.
- II. NVIDIA® GeForce® GTX 1650 4GB discrete graphics controller is required to configure with dual battery and 90W AC adapter.
- III. NVIDIA® GeForce® GTX 1650 4GB discrete graphics controller, DVD super multi drive, 1D/2D imager barcode reader and 2nd storage are mutually exclusive options.
- IV. Trained user swappable.
- V. For optional 2nd storage, the operating temperature is -10°C to 63°C / 14°F to 145°F.
- VI. Units with 4G/5G option come with an embedded SIM card slot.
- VII. 5M webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- VIII. The optional 2nd LAN is 2.5GBASE-T Ethernet.
- IX. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices. Users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that are operating in the area.
- X. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XI. Only available in the US, UK, EU, Australia, and New Zealand.
- XII. Support GPS, GLONASS, Galileo, BeiDou and QZSS.
- XIII. 13.56MHz HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- XIV. Weight and dimensions vary from configurations and optional accessories.
- XV. Drop test results vary from configurations and optional accessories.
- XVI. Tested by an independent third-party test lab following MIL-STD-810H.
- XVII. For optional DVD super-multi drive, the operating temperature is -10°C to 50°C / 14°F to 122°F.
- XVIII. Available when barcode reader option is selected.
- XIX. Models require either embedded or standalone GPS module.
- XX. The multimedia bay 2nd SSD and DVD super multi drive can only replace the weight saver and the original configuration.
- XXI. Gamber-Johnson and Havis vehicle docks are e-mark certified.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

|                      | Vehicle Dock (Gamber-Johnson, Havis)        | DS100 USB-C Docking Station                 |
|----------------------|---------------------------------------------|---------------------------------------------|
| Serial Port          | 1                                           | -                                           |
| Audio Output         | -                                           | 1                                           |
| DC in Jack           | 1                                           | 1                                           |
| USB                  | USB-A 3.0 x 2, USB-A 2.0 x 2, USB-C 3.0 x 1 | USB-A 2.0 x 2, USB-A 3.2 x 3, USB-C 3.2 x 2 |
| LAN                  | 1                                           | 1                                           |
| HDMI                 | 1                                           | 1                                           |
| Display Port         | -                                           | 2                                           |
| RF Antenna Connector | 3 (WWAN, WLAN, GPS)                         | -                                           |
| Kensington Lock      | -                                           | -                                           |

# Getac

Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford,  
Shropshire TF3 3BJ, United Kingdom  
Tel : +44 (0) 1952 207 222

Sales-Getac-UK@getac.com |

www.getac.com/en/

Copyright © 2024 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.