# Getac

## B360 ACCESSORY SPEC BROCHURE



Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel: +44 (0) 1952 207 222 Sales-Getac-UK@getac.com | www.getac.com/en/

## **CARRY BAG**

## **Features & Benefits**

Constructed of durable Nylon/air mesh fabric and featuring an adjustable padded shoulder strap, this compact carry bag provides sturdy protection for your device while giving maximum comfort. The functional pockets inside offer the optimal solution to transport the laptop and needed accessories together in one case, delivering extra convenience and go-anywhere productivity to mobile professionals.

### **Product Information**

Dimensions: L 405 x W 330 x D 100mm

Weight: 1.335kg

Main Material : Nylon, air mesh fabric

### **SKU ID**

GMBCX7



## **B360 EXTERNAL DUAL BAY BATTERY CHARGER**

## **Features & Benefits**

Getac B360 External Dual-Bay Charger is designed to charge up to 2 B360 batteries at the same time. It provides you the benefit of charging and storing the 2 batteries together when there are limited space and power sockets. The two bays have two channels, each with their own LED power indicators. The integrated five-light LED power indicators display the charge of each battery.

#### **Product Information**

AC Input: 100V~240V DC Output: 17.4V, 4A Max. Number of charge bays: 2 bays

Dimensions: L 160 x W 180 x H 72.5mm

Weight: 1.2kg

Compatible with both B360 (GBM3X6) and B360Pro (GBM6X5) system battery.

#### **SKU ID**

GCMCEH (EU Power Cord) GCMCUH (US Power Cord) GCMCKH (UK Power Cord) GCMCAH (AU Power Cord) GCMCCH (CHN Power Cord) GCMCTH (TW Power Cord)



## **B360 MULTI BAY BATTERY CHARGER**

## **Features & Benefits**

This 8-bay battery charger is designed with 8 charging bays for charging multiple battery packs simultaneously, providing an efficient charging solution for different situations. It provides users with an efficient charging solution. The integrated five-light LED power indicators display the charge of each battery.

#### **Product Information**

AC Input: 100V~240V AC, 4.2A 50~60Hz

DC Output: 19.5V, 16.9A \* w / 330W AC Adapter Number of charge bays: 8 bays

Dimensions: L 465 x W 245 x H 101~117.4 mm Weight: 4.7 kg, not including battery packs

Compatible with both B360 (GBM3X6) and B360Pro (GBM6X5) system battery.

### **SKU ID**

GCECEL (EU Power Cord)
GCECUL (US Power Cord)
GCECKL (UK Power Cord)
GCECAL (AU Power Cord)
GCECCL (CHN Power Cord)
GCECTL (TW Power Cord)



## **B360 SPARE MAIN BATTERY**

## **Features & Benefits**

The Getac B360 Spare Main Battery is designed to provide the main power source for your device when the AC adapter is not connected. It is designed with an LED power indicator and status check button, which allows users to identify the battery capacity status at a push of a button.

### **Product Information**

Battery type : Lithium-ion Cell designation : 3S1P Output Voltage : 11.1V

Capacity: typical 2100mAh; min. 2040mAh Dimensions: L 141.05 x W 74.3 x H 10.1mm

Weight: 154g

### **SKU ID**

GBM3X6



## **100W TYPE-C AC ADAPTER**

## **Features & Benefits**

The 100W Type-C AC adapter as an additional charging solution to charge Getac rugged tablets and laptops with inherent USB type-C ports as well as the power delivery functionality. The Type-C adapter features a reversible connector type that reduces connector damages due to misuse.

#### **Product Information**

Input: 100V-240V Output: 20V, 5A, 100W

Dimensions: L 140 x W 65 x H 25mm

Weight: 326g

Input cable length: 1830mm Output cable length: 1500mm

### **SKU ID**

GAT1E1 (EU Power Cord) GAT1U1 (US Power Cord) GAT1K1 (UK Power Cord) GAT1A1 (AU Power Cord) GAT1C1 (CHN Power Cord) GAT1T1 (TW Power Cord) GAT1I1 (IN Power Cord)



## 120W AC ADAPTER WITH POWER CORD

## **Features & Benefits**

Specifically designed for use with the office docking station and performance SKU, this 120W AC adapter provides efficient delivery to power your devices.

#### **Product Information**

Input: 100V-240V Output: 19V, 6.32A Max.

Dimensions: L 131.5 x W 69 x H 25.6mm

Weight: 412g

Input cable length: 1830mm Output cable length: 1800mm

### **SKU ID**

GAA3E2 (EU Power Cord) GAA3U2 (US Power Cord) GAA3K2 (UK Power Cord) GAA3A2 (AU Power Cord) GAA3C2 (CHN Power Cord) GAA3T2 (TW Power Cord) GAA3R2 (KR Power Cord) GAA3I2 (IN Power Cord) GAA3G2 (AG Power Cord)



## 90W AC ADAPTER

## **Features & Benefits**

This adapter is designed to power the device and charge its internal battery from an AC power source. A country-specific power cord is included with the adapter to fit the local power outlet in your destination country.

#### **Product Information**

Input: 100V-240V

Output: 19V, 4.74 A, 90W

Dimensions: L 140.1 x W 65.1 x H 25.4 mm

Weight: 275 g

Input cable length: 1830mm Output cable length: 1500mm

### **SKU ID**

GAA9U7 (US Power Cord) GAA9E7 (EU Power Cord) GAA9K7 (UK Power Cord) GAA9C7 (CHN Power Cord) GAA9A7 (AU Power Cord) GAA9T7 (TW Power Cord) GAA9I7 (IN Power Cord) GAA9G7 (ARG Power Cord) GAA9J7 (JPN Power Cord) GAA9R7 (KR Power Cord)



## 90W MIL-STD-461 AC ADAPTER

## **Features & Benefits**

This MIL-STD-461G AC adapter has passed the military standard and testing specification to ensure the conducted emissions (CE), conducted susceptibility (CS), radiated emissions (RE), and radiated susceptibility (RS) of the adapter can meet the requirements for the control of electromagnetic interference.

#### **Product Information**

Input: 115V-230V, 1.6A 50~60Hz

Output: 19V, 4.74A, 90W

Dimensions: L 170 x W 75 x H 45mm Weight: 880g (without power cord) Input cable length: 1530mm Output cable length: 1800mm

### **SKU ID**

GAAGE5 (EU Power Cord) GAAGU5 (US Power Cord) GAAGK5 (UK Power Cord) GAAGC5 (CHN Power Cord) GAAGA5 (AU Power Cord) GAAGI5 (IN Power Cord) GAAGT5 (TW Power Cord)



## **B360 OFFICE DOCK WITH AC ADAPTER**

## **Features & Benefits**

The Getac office dock brings out multiple I/O ports for connecting essential peripheral devices in the office environment. Through the integrated ethernet, RS232, or USB connections, users can quickly collect and synchronize field data with central offices for real-time reporting and analytics.

#### **Product Information**

Dimensions : L 380.1 x W 291.2 x H 77.2 mm Weight : 1.615kg \* w / 120W AC Adapter

I/O Ports : DC in Jack x 1, Audio Output x 1, Microphone x 1, USB 2.0 x 2, USB 3.0 x 3, LAN x 2, HDMI x 1, VGA x 1, Serial Port x 1, Kensington Lock x 1

### **SKU ID**

GDODEB (EU Power Cord) GDODUB (US Power Cord) GDODKB (UK Power Cord) GDODAB (AU Power Cord) GDODCB (CHN Power Cord) GDODTB (TW Power Cord)



## **CAPACITIVE STYLUS & TETHER**

## **Features & Benefits**

This capacitive stylus is lightweight and easy to control, spring-loaded nib increasing the durability also allowing smooth and comfortable interaction with the touch screen without worrying about scratching the screen or leaving fingerprints on it. The stylus comes with a tether to keep it attached to the tablet to get lost or misplaced.

### **Product Information**

Nib Material : Conductive PET Fiber

Stylus Dimensions: 108.7 mm; Ø9 mm

Tip size : 2.7 mm ; Ø2.8 mm


Color: Black

Tether Length: 304 mm

#### SKU ID

**GMPSXN** 



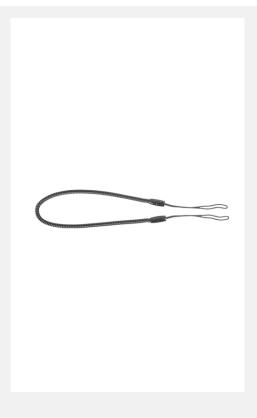

## GETAC DS100 USB-C DOCKING STATION

## **Features & Benefits**

The Getac DS100 USB-C Docking Station, featuring a slim and compact design, seamlessly consolidates cables on the workstation. This allows users to swiftly create a personalized workspace and organize their daily office environment. Compatible with various Getac laptop and tablet models, it provides extra connectivity and multiple I/O ports for additional peripherals and data sources. With support for MAC Address Pass-Through, Wake-on-LAN (WoL), and PXE Boot, the DS100 aids IT administrators in maintaining a secure, efficient, and well-managed network infrastructure. (The docking station's performance, including transfer speeds and display capabilities, may be limited by chipset and operating system when used with Getac Android systems. See the user manual for details.)

#### **Product Information**

Dimensions: L 207 x W 90 x H 31mm (8.15" x 3.54" x 1.22")

Weight: 335g (0.74lbs)

Power Cable Length: 1.8m (5.9ft)

USB-C Upstream Cable Length: 1m (3.28ft)

I/O Ports: DC in Jack x 1, Audio in/out combo x 1, USB 2.0 x 2, USB 3.2 Gen 1 Type-A x 3, USB 3.2 Gen 2 Type-C x 2, LAN x 1, HDMI 2.0 x 1,

Display port x 2

#### **SKU ID**

GDDSE1 (EU Power Cord)

GDDSU1 (US Power Cord)

GDDSK1 (UK Power Cord)

GDDSA1 (AU Power Cord)

GDDSC1 (CHN Power Cord)

GDDST1 (TW Power Cord)

GDDSI1 (IN Power Cord)

(Long production lead time. Estimated ready-to-order date: 2024/12/31)





## **B360 PROTECTION FILM AG**

## **Features & Benefits**

This screen protection film is cut precisely to fit the B360 Fully Rugged Notebook and is easy to install and remove without leaving a sticky residue. With anti-glare coating, it not only protects the screen from the rigors of daily use but also help diffuses light on the screen and reduces glare, providing effortless readability for displayed information under common ambient lighting conditions.

### **Product Information**

Dimensions: L 303.0 x W 174.6 x 0.24mm

Main Material : PET

### **SKU ID**

**GMPFXP** 



## **B360 MAIN STORAGE WITH CANISTER**

## **Features & Benefits**

Getac B360 Main Storage with canister is designed to provide you the ease of installation and allow you to remove your confidential data when your device is sent for service.

### **Product Information**


SSD Storage option: 256GB, 512GB, 1TB, 2TB

Type: PCle NVMe SSD

Dimensions: L 110.5 x W 27 x H 5mm

### **SKU ID**

GSSEX3 (256GB PCle SSD) GSSFX3 (512GB PCle SSD) GSSGX3 (1TB PCle SSD) GSSHX1 (2TB PCle SSD)

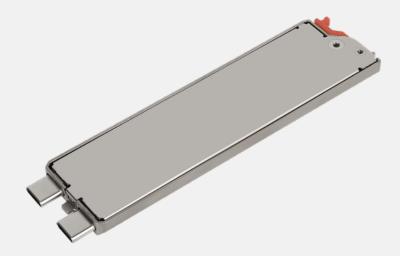

## 120W DC-DC VEHICLE ADAPTER

## **Features & Benefits**

The 120W vehicle adapter comes with a choice of two types of connections: a bare wire with individual wire ends already stripped, and a cigarette lighter plug for easy connection to the cigarette lighter socket in the vehicle interior, providing a convenient way to charge and power your tablet while you are on the road.

#### **Product Information**

Input Voltage: 11VDC~ 32VDC Output Voltage: 19VDC Output current: 6.32A Max.

Case Dimensions: L 131.5 x W 65.6 x H 30mm

Weight: 362g

Input cable length : 1900mm Output cable length : 1000mm

### **SKU ID**

GAD2X4 (Cigarette Lighter Plug Version) GAD2X8 (Bare Wire Version)



